

Принадлежности для штативов CARL ROTH ROTILABO, MAXI, GIROFIX

Технические характеристики

Алматы (7273)495-231
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Саранск (8342)22-96-24
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тургут (3462)77-98-35
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия (495)268-04-70

Казахстан (772)734-952-31

Киргизия (996)312-96-26-47



Stand material



H-stand

Bochem. Material: Aluminium, base made of grey cast iron.
Support rods Ø 12 mm.

Delivery incl. base, 3 stand rods 80 cm, 2 stand rods 50 cm and 6 boss heads.

Width (mm)	Depth (mm)	Height (mm)	Weight (kg)	Art. No.	Pack Qty.	
500	250	800	6,5	CHH2.1	1 unit(s)	



H-stand

IKA.
Suitable for larger, heavy devices and structures such as stirrers.
Tilt-resistant thanks to H-base. With balance screw to compensate for uneven surfaces on the laboratory table.
Support rods-Ø: 34 mm. Max. weight load: 10 kg.

Type	Width (mm)	Depth (mm)	Height (mm)	Art. No.	Pack Qty.	
R 2722	460	420	1,010	CC16.1	1 unit(s)	

Height-adjustable

With compression sprung telescopic support rod for smoothly moving heavy devices or structures up and down. Lifting height: 390 mm.

Type	Width (mm)	Depth (mm)	Height-adjustability (mm)	Art. No.	Pack Qty.	
R 2723	460	420	620-1010	CC17.1	1 unit(s)	



H-tripod S2 series

Heidolph. Material: Stainless steel V2A.

The support rod is additionally secured with a nut which prevents it from being unscrewed accidentally. With levelling screw to compensate for unevenness. Max. weight load: 4 kg.

(1) Standard

Tripod rods-Ø 25 mm.

Type	Width (mm)	Depth (mm)	Height (mm)	Art. No.	Pack Qty.	
S2	345	420	700	TL67.1	1 unit(s)	
S2 XXL	345	420	1,000	TL68.1	1 unit(s)	

(2) Tele

With extendable tripod rod from 725 to 1025 mm.
Support rods-Ø 32 mm.

Type	Width (mm)	Depth (mm)	Height-adjustability (mm)	Art. No.	Pack Qty.	
Tele S2	345	420	725-1025	TL69.1	1 unit(s)	



Plate stands

IKA. Material: Stainless steel, tripod plate epoxy coated, rubber pad.

With slip-resistant foil on the plate. The support rod is additionally secured with a nut under the plate which prevents it from being unscrewed accidentally. Support rod-Ø: 16 mm. Max. weight load: 5 kg.

Type	Width (mm)	Depth (mm)	Height (mm)	Art. No.	Pack Qty.	
R 1825	200	316	560	CC13.1	1 unit(s)	
R 1826	200	316	800	CC14.1	1 unit(s)	
R 1827	200	316	1,000	CC15.1	1 unit(s)	

Stand material



Stand plate with rods

Kartell. Material: PP, Rods made of chrome-plated steel.

Stand plate height 15 mm. Stand rod length 250 mm, Ø 12 mm, can be screwed together to increase the overall height.

Delivery incl. two support rods.

Version	Width (mm)	Depth (mm)	Height-adjustability (mm)	Art. No.	Pack Qty.	
Central insertion opening	300	150	>250	TT24.1	1 unit(s)	
Side insertion opening	150	300	>250	TT25.1	1 unit(s)	



Flexible stand ROTILABO®

Usbeck. Material: Die-cast zinc, Brass, nickel-plated.

With safety base.

Length 300 mm.

Version	Span (mm)	Art. No.	Pack Qty.	
3 prong	0–40	X094.1	1 unit(s)	
round	12–25	X095.1	1 unit(s)	



Flex clamp ROTILABO® with M 10 thread


Usbeck. Material: Die-cast zinc, Brass nickel-plated.

For use on lifting platforms (Art. No. YT69.1ff) or stand plates with M 10 thread (e.g. Art. No. X072.1ff).

Technical specifications:

Art. No.	YT72.1	YT73.1
Total length	300 mm	

Version	Span (mm)	Art. No.	Pack Qty.	
3 prong	0–40	YT72.1	1 unit(s)	
round	12–25	YT73.1	1 unit(s)	



Stand plates classic

Bochem. Material: Steel, powder-coated.

Acc. to DIN 12892.

With M10 threaded hole in the centre of the face side.

Stable position, with four feet, one adjustable foot.

Delivery without stand rod, please order separately.

Width (mm)	Depth (mm)	Weight (g)	Art. No.	Pack Qty.	
130	210	1300	2369.1	1 unit(s)	
150	300	2200	2376.1	1 unit(s)	
160	250	2000	2375.1	1 unit(s)	
200	315	3000	2377.1	1 unit(s)	



Stand plates ROTILABO® high form

ROTH SELECTION. Material: Stainless steel 18/10 (material 1.4301).

With four anti-slip feet for safe positioning. M 10 threaded hole in the centre of the face side. Ground clearance 28 mm.

Width (mm)	Depth (mm)	Height (mm)	Weight (g)	Art. No.	Pack Qty.	
130	210	33	1600	EPA1.1	1 unit(s)	
150	300	33	2500	EPA2.1	1 unit(s)	



Stand plates stable position

Bochem. Material: Stainless steel 18/10 (material 1.4301-5, AISI type 304-303), anti-magnetic.

Acc. to DIN 12892. Wide, heavy adjusting feet with non-slip rubber surface for high stability, 1 adjustable foot to compensate for uneven surfaces. M10 threaded hole in the centre of the face side.

Delivery without stand rod, please order separately.

Width (mm)	Depth (mm)	Weight (g)	Art. No.	Pack Qty.	
130	210	1600	C851.1	1 unit(s)	
150	300	2000	C853.1	1 unit(s)	
160	250	1900	C852.1	1 unit(s)	
200	315	2400	C854.1	1 unit(s)	



Stand material



Stand plates ROTILABO®

ROTH SELECTION. Material: Stainless steel 18/10 (material 1.4301).
With four adjustable feet made of plastic. M 10 threaded hole in the centre of the face side.

Width (mm)	Depth (mm)	Weight (g)	Art. No.	Pack Qty.
100	180	850	ENY4.1	1 unit(s)
142	220	1470	ENY5.1	1 unit(s)
142	250	1670	ENY6.1	1 unit(s)
142	285	1900	ENY7.1	1 unit(s)
165	330	2600	ENY9.1	1 unit(s)
200	315	2970	ENY8.1	1 unit(s)



Tripods ROTILABO®

Usbeck. Material: Steel, powder-coated.
With M10 threaded hole.
Rubber feet for stability.

Arm length (mm)	Art. No.	Pack Qty.
80	X072.1	1 unit(s)
115	X075.1	1 unit(s)
150	X076.1	1 unit(s)
185	X077.1	1 unit(s)



Tripods ROTILABO®

Usbeck. Material: Steel, powder-coated.
Fixing of the rods with locking screw M 6.

- For rods up to Ø 13 mm
- Rubber feet for stability

Arm length (mm)	Art. No.	Pack Qty.
80	X078.1	1 unit(s)
115	X079.1	1 unit(s)
150	X080.1	1 unit(s)
185	X081.1	1 unit(s)



Tripod duo

Usbeck. Material: Steel, powder-coated.

- For two rods up to Ø 16 mm
- M 6 joint screws
- Anti-slip adjustable feet

Arm length (mm)	Art. No.	Pack Qty.
150	1A05.1	1 unit(s)
185	1A06.1	1 unit(s)



Stand base

Bochem. Material: Aluminium alloy (Laboral).
For stand rod-Ø 12-13 mm. Secured by socket head screw.
Base Ø 50 mm. With three screw holes.

Delivery without mounting material.

Version	Art. No.	Pack Qty.
For wall/ceiling attachment	CHE9.1	1 unit(s)




Stand base

Bochem. Material: Malleable cast iron.
For up to three Ø 12 mm stand rods. Rods are secured by slotted-head screws. Base Ø 80 mm. With four screw holes.

Delivery without mounting material.

Version	Art. No.	Pack Qty.
For wall/ceiling attachment	CHE8.1	1 unit(s)

Stand material

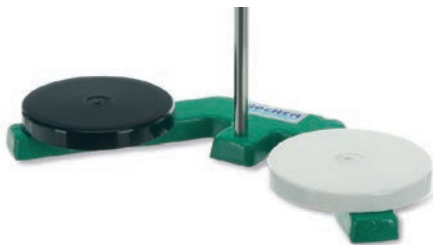

Burette stand

Bochem. Material: Grey cast iron, stainless steel stand rod (18/10), plastic plates.

For fastening 1-2 burettes using burette clamps (please order separately).

- Stand rod length 600 mm, Ø 10 mm
- Plate Ø 105 mm

Delivery incl. stand rod and 2 plates (black and white).

Width (mm)	Depth (mm)	Platform height (mm)	Total height (mm)	Weight (kg)	Art. No.	Pack Qty.	
300	130	15	620	1,975	1C4C.1	1 unit(s)	



Table clamp ROTILABO®

Usbeck. Material: Aluminium powder-coated.

For rods up to Ø 13 mm and table plates up to 60 mm thick.

Weight (g)	Art. No.	Pack Qty.	
340	X082.1	1 unit(s)	



Stand rods

Usbeck. Material: Steel stainless (material 1.4305), solid.

With M10 thread.

Length (mm)	Ø (mm)	Art. No.	Pack Qty.	
600	10	2378.1	1 unit(s)	
750	12	2379.1	1 unit(s)	
1,000	12	2380.1	1 unit(s)	
1,250	12	2381.1	1 unit(s)	
1,500	16	2382.1	1 unit(s)	



Stand rods ROTILABO®

ROTH SELECTION. Material: Stainless steel stainless (material 1.4305), polished.

With M10 thread.

Length (mm)	Ø (mm)	Art. No.	Pack Qty.	
450	12	CHC9.1	1 unit(s)	
500	12	CHE0.1	1 unit(s)	
600	12	P110.1	1 unit(s)	
750	12	P111.1	1 unit(s)	
1,000	12	P112.1	1 unit(s)	
1,250	12	P113.1	1 unit(s)	
1,500	12	P114.1	1 unit(s)	



Stand rods ROTILABO® without thread

ROTH SELECTION. Material: Stainless steel stainless (material 1.4305), polished.

Length (mm)	Ø (mm)	Art. No.	Pack Qty.	
450	12	CHE1.1	1 unit(s)	
500	12	CHE2.1	1 unit(s)	
600	12	CHE3.1	1 unit(s)	
750	12	CHE4.1	1 unit(s)	
1,000	12	CHE5.1	1 unit(s)	
1,250	12	CHE6.1	1 unit(s)	
1,500	12	CHE7.1	1 unit(s)	



Double boss heads rectangular


Bochem. Material: Malleable cast iron, chrome-plated.

90° angle. With clamping screws.

Suitable for	Art. No.	Pack Qty.	
Tripod rods up to Ø 16.5 mm	2134.1	1 unit(s)	
Tripod rods up to Ø 20 mm	2135.1	1 unit(s)	
Tripod rods up to Ø 36 mm	2179.1	1 unit(s)	



Stand material

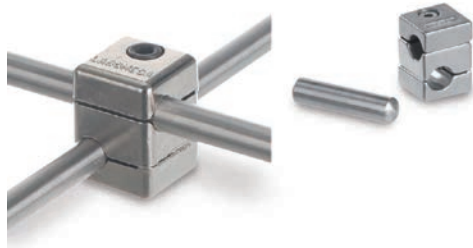

Double boss heads square

Bochem.

For connecting 2 stand rods Ø 12-13 mm at an angle of 90°. With hexagon socket screws. Angles from 0-360° can be set by connecting two double boss heads using a connecting rod.

Delivery without connecting rod, please order separately.

Material specification	Suitable for	Art. No.	Pack Qty.
stainless steel 18/10	Tripod rods Ø 12-13 mm	CHX6.1	1 unit(s)
Aluminium alloy (Laboral)	Tripod rods Ø 12-13 mm	CHX7.1	1 unit(s)



Double boss head rectangular Aluminium

Bochem. Material: Aluminium.

Angle 90°. With clamping screw, M8 thread.

Suitable for	Art. No.	Pack Qty.
Stand rods up to Ø 16.5 mm	1C4E.1	1 unit(s)



Cross double boss head

Bochem. Material: Malleable cast iron, chrome-plated.

90/180° angle. With clamping screws.

Suitable for	Art. No.	Pack Qty.
Tripod rods up to Ø 16.5 mm	2194.1	1 unit(s)



Clamp stainless steel

Bochem. Material: Stainless steel 18/10.

With heart-shaped safety screws.

Suitable for	Art. No.	Pack Qty.
Stand rods up to Ø 16.5 mm	XT63.1	1 unit(s)



Double boss head rotatable

Usbeck. Material: Die-cast zinc powder-coated, with nickel-plated brass clamping screws.

Suitable for	Art. No.	Pack Qty.
Rods up to Ø 16 mm	2136.1	1 unit(s)



Double boss head rotatable stainless steel

Bochem. Material: Stainless steel (18/10).

Angle 0-360°. With heart-shaped safety screws, M6 thread.

Suitable for	Art. No.	Pack Qty.
Stand rods up to Ø 16 mm	1C5E.1	1 unit(s)

Stand material



Ball sleeves

Usbeck. Material: Die-cast zinc, with nickel-plated articulated screws.
Ball Ø 35 mm.

Material specification	Suitable for	Art. No.	Pack Qty.	
unvarnished	Rods up to Ø 13 mm	PH47.1	1 unit(s)	
nickel-plated	Rods up to Ø 13 mm	PH48.1	1 unit(s)	
powder-coated	Rods up to Ø 13 mm	PH46.1	1 unit(s)	



Hook boss heads

Usbeck.
For securely connecting stand rods or clamps to rods at a right angle.
Powder-coated steel with nickel-plated brass screw and plastic handle.

Material specification	Suitable for	Art. No.	Pack Qty.	
Stainless steel	Tripod rods up to Å 13 mm	E040.1	1 unit(s)	
Steel powder coated	Tripod rods up to Å 13 mm	E039.1	1 unit(s)	



Cross double boss head

Bochem. Material: Aluminium.
90° angle. With easily accessible clamping screws.


Suitable for	Art. No.	Pack Qty.	
Stand rods up to Ø 16.5 mm	P179.1	1 unit(s)	



Universal clamp

Usbeck. Material: Aluminium powder-coated, nickel-plated brass clamping screws.
90/180° angle.

Suitable for	Art. No.	Pack Qty.	
Stand rods up to Ø 13 mm	P178.1	1 unit(s)	

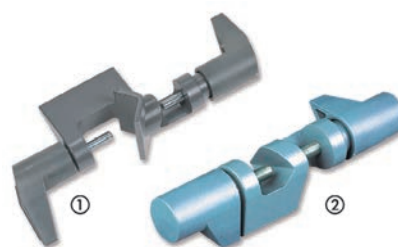

Clamps

IKA. Material: Aluminium (cast).

R 270

Suitable for tripod type R 2722, R 2723.

Pic.	Suitable for	Art. No.	Pack Qty.	
(1)	Tripod rods Ø 25-36 mm, extension arms Ø 5-21 mm	CC18.1	1 unit(s)	

R 182

Suitable for tripod type R 1825, R 1826, R 1827.

Pic.	Suitable for	Art. No.	Pack Qty.	
(2)	Tripod rods Ø 6-12 mm, extension arms Ø 6-16 mm	CY92.1	1 unit(s)	



Stand material



Universal boss head GIROFIX rotatable

Bochem. Material: Aluminium.

Angle 0–360 °.

Suitable for	Art. No.	Pack Qty.	
Stand rods up to Ø 15 mm	1C4K.1	1 unit(s)	



Three-angle boss head

Bochem. Material: Aluminium (Duraluminium alloy).

Angle 90 + 180 + 270 °. Suitable for three-dimensional constructions and constructions across multiple levels.

Suitable for	Art. No.	Pack Qty.	
Stand rod Ø 9-13 mm	1C4L.1	1 unit(s)	
Stand rod Ø 19-23 mm	1C4N.1	1 unit(s)	



Frame boss head

Bochem. Material: Malleable cast iron.

Angle 90 °. With ring bolt, M6 thread.

Suitable for	Art. No.	Pack Qty.	
Stand rods up to Ø 13 mm	1C4H.1	1 unit(s)	



Stand clamp universal

ROTH SELECTION.

4-finger jaws.

Technical specifications:

Art. No.	KX88.1	KX89.1
Total length	240 mm	

Stainless steel

Material: Stainless steel 18/10 (Remanit 4301), clamps with cork inlays.

Pic.	Version	Span (mm)	Art. No.	Pack Qty.	
(1)	Four finger	90	KX88.1	1 unit(s)	

Die-cast zinc

Material: Die-cast zinc clamps with cork inlays.

Pic.	Version	Span (mm)	Art. No.	Pack Qty.	
(2)	Four finger	80	KX89.1	1 unit(s)	

Stand material



Stand clamp universal Aluminium

Bochem. Material: Aluminium, clamps with cork inlays.
4-finger jaws.

Technical specifications:

Art. No.	1C50.1
Shaft length	180 mm
Ø Shaft	12 mm

Version	Span (mm)	Pack.	Art. No.	Pack Qty.	
Four-finger	0-80	1 piece	1C50.1	1 unit(s)	



Stand clamp large span

Bochem.
Acc. to DIN 12894.

Stainless steel


Material: Stainless steel 18/10, clamps with cork inlays.

Version	Span (mm)	Art. No.	Pack Qty.	
round	80	CHL9.1	1 unit(s)	
round	100	CHN0.1	1 unit(s)	
round	120	CHN1.1	1 unit(s)	
round	150	CHN2.1	1 unit(s)	

Galvanised steel

Material: Steel galvanised, clamps with cork inlays.

Version	Span (mm)	Art. No.	Pack Qty.	
round	80	CHL5.1	1 unit(s)	
round	100	CHL6.1	1 unit(s)	
round	120	CHL7.1	1 unit(s)	
round	150	CHL8.1	1 unit(s)	




Stand clamp with boss head

Usbeck. Material: Die-cast zinc powder-coated, clamps with cork inlays.

Technical specifications:

Art. No.	X083.1	X084.1	X086.1
Total length	185 mm	195 mm	200 mm

Version	Span (mm)	Art. No.	Pack Qty.	
round	12-25	X083.1	1 unit(s)	
round	20-40	X084.1	1 unit(s)	
round	38-60	X086.1	1 unit(s)	

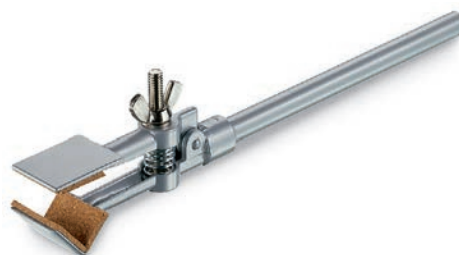

Stand clamp

Usbeck. Material: Die-cast zinc powder-coated, clamps with cork inlays.

Technical specifications:

Art. No.	P172.1	P174.1	P175.1
Ø Shaft	10 mm		

Version	Span (mm)	Art. No.	Pack Qty.	
square	10-25	P172.1	1 unit(s)	
square	13-40	P174.1	1 unit(s)	
square	26-60	P175.1	1 unit(s)	



Stand clamp die-cast zinc

Usbeck. Material: Die-cast zinc powder-coated, clamps with cork inlays.

Technical specifications:

Art. No.	1993.1	1995.1	1998.1
Ø Shaft	10 mm		

Version	Span (mm)	Art. No.	Pack Qty.	
round	12-25	1993.1	1 unit(s)	
round	20-40	1995.1	1 unit(s)	
round	38-60	1998.1	1 unit(s)	



Stand material



Stand clamp stainless steel

Bochem. Material: Stainless steel 18/10, clamps with cork inlays. With two round jaws.

Technical specifications:

Art. No.	2000.1	2004.1	2007.1	P177.1
Shaft length	150 mm			180 mm
Ø Shaft	10 mm			12 mm

Version	Span (mm)	Art. No.	Pack Qty.	
round	20–25	2000.1	1 unit(s)	
round	25–40	2004.1	1 unit(s)	
round	50–60	2007.1	1 unit(s)	
round	40–80	P177.1	1 unit(s)	



Stand clamp adjustable

Bochem.

Clamping width can be adjusted independently of each other using 2 adjusting screws.

Technical specifications:

Art. No.	1C4P.1	1C4X.1	1C4T.1
Shaft length	125 mm	140 mm	
Ø Shaft	8 mm	12 mm	

Stainless steel

Material: Stainless steel (18/10), jaws coated with silicone.

Version	Span (mm)	Art. No.	Pack Qty.	
round	8-30	1C4P.1	1 unit(s)	
round	20-75	1C4T.1	1 unit(s)	

Aluminium

Material: Aluminium (Laboral alloy), jaws coated with PVC.

Version	Span (mm)	Art. No.	Pack Qty.	
round	22-70	1C4X.1	1 unit(s)	



Stand clamp universal swivelling

ROTH SELECTION. Material: Die-cast zinc powder-coated, clamps with cork inlays.

4-finger jaws. Swivel range 180°.

Technical specifications:

Art. No.	YP54.1
Total length	275 mm
Shaft length	150 mm
Ø Shaft	10 mm

Version	Span (mm)	Art. No.	Pack Qty.	
Four finger	0–80	YP54.1	1 unit(s)	



Flex clamp ROTILABO®

Bochem.

Technical specifications:

Art. No.	C863.1	C864.1	C865.1	C866.1	C867.1
Shaft length	250 mm	200 mm	250 mm		200 mm
Ø Shaft	12 mm				8 mm

Delivery without order boss.

Laboral

Material: Aluminium alloy, Nickel-plated shaft.

Pic.	Version	Span (mm)	Art. No.	Pack Qty.	
(2)	round	15–65	C864.1	1 unit(s)	
(5)	Three-Fingered	0–30	C867.1	1 unit(s)	

Stainless steel

Material: Stainless steel 18/10, Nickel-plated shaft.

Pic.	Version	Span (mm)	Art. No.	Pack Qty.	
(1)	round	25–40	C863.1	1 unit(s)	
(3)	rectangular	25–40	C865.1	1 unit(s)	
(4)	Three-Fingered	0–20	C866.1	1 unit(s)	

Stand material



Flex clamp ROTILABO® with rotatable boss head

Usbeck. Material: Die-cast zinc, Brass, nickel-plated.

Technical specifications:

Art. No.	X087.1	X088.1
Total length	300 mm	

Version	Span (mm)	Suitable for	Art. No.	Pack Qty.	
3 prong	0–40	Rods up to Ø 16 mm	X087.1	1 unit(s)	
round	12–25	Rods up to Ø 16 mm	X088.1	1 unit(s)	




Stand clamp ROTILABO® three-finger type

Usbeck. Material: Die-cast zinc powder-coated, plastic-coated fingers.

Technical specifications:

Art. No.	X096.1	X097.1	X098.1
Total length	225 mm		250 mm
Shaft length	140 mm		
Ø Shaft	8 mm	10 mm	

Version	Span (mm)	Art. No.	Pack Qty.	
Three-finger	0–40	X096.1	1 unit(s)	
Three-finger	0–40	X097.1	1 unit(s)	
Three-finger	25–80	X098.1	1 unit(s)	



Stand clamp ROTILABO® three-finger type

Bochem. Material: Stainless steel 18/10, silicone-coated fingers.

Technical specifications:

Art. No.	CHN3.1	C827.1
Total length	320 mm	340 mm
Shaft length	190 mm	
Ø Shaft	12 mm	

Pic.	Version	Span (mm)	Art. No.	Pack Qty.	
(1)	Three-finger	0–80	CHN3.1	1 unit(s)	
(2)	Three-finger	0–120	C827.1	1 unit(s)	



Stand clamp three-finger type adjustable

Bochem. Material: Aluminium (Laboral alloy), jaws coated with PVC. Clamping width can be adjusted independently of each other using 2 adjusting screws.

Technical specifications:

Art. No.	1C4Y.1
Shaft length	140 mm
Ø Shaft	12 mm

Version	Span (mm)	Art. No.	Pack Qty.	
Three finger	12–100	1C4Y.1	1 unit(s)	



Stand clamp ROTILABO® four-finger type

Bochem. Material: Stainless steel 18/10, silicone-coated fingers.


Technical specifications:

Art. No.	CHN6.1
Total length	360 mm
Shaft length	190 mm
Ø Shaft	12 mm

Version	Span (mm)	Art. No.	Pack Qty.	
Four-finger	50–150	CHN6.1	1 unit(s)	



Stand material



Stand clamp ROTILABO® cooler clamps

Bochem. Material: Malleable cast iron chrome-plated, clamp fingers with silicone coating.

With movable shaft.

Technical specifications:

Art. No.	C826.1
Shaft length	150 mm
Ø Shaft	12 mm

Version	Span (mm)	Art. No.	Pack Qty.	
Cooler clamp	50–100	C826.1	1 unit(s)	



Stand clamp MAXI

Bochem. Material: Steel (chrome-plated), jaws with fibreglass coating.

To securely fix beakers.

Technical specifications:

Art. No.	1C51.1
Total length	400 mm
Shaft length	210 mm

Version	Span (mm)	Art. No.	Pack Qty.	
Beaker holder	80-180	1C51.1	1 unit(s)	



A121 °C

Universal holder ROTILABO®

ROTH SELECTION. Material: PP. Autoclavable: Yes.

Suitable for fixing or connecting measuring probes, hoses and thermometers to beakers or Erlenmeyer flasks. The white holder has an additional opening.

Colour	Span (mm)	Length (mm)	Width (mm)	Art. No.	Pack Qty.	
green	10, 12, 15	85	22	C535.1	5 unit(s)	
white	6, 7, 9, 11	100	15	C534.1	5 unit(s)	
orange	7, 9, 11	70	15	C533.1	5 unit(s)	



A121 °C

Clamping tongs

Hammacher. Material: Stainless steel 18/10 (Remanit 4301).

Autoclavable: Yes.

Jaws ribbed on inside for better grip.

Production-related indentations do not affect the functionality.

Length (mm)	Art. No.	Pack Qty.	
200	YL66.1	1 unit(s)	
280	YL67.1	1 unit(s)	

Stand material



Stand clamp chain clamps

Usbeck.

With cork inlay. For fastening flasks and other laboratory vessels.

Technical specifications:

Art. No.	E050.1	E051.1	E052.1
Shaft length	200 mm		
Ø Shaft	10 mm		

Version	Suitable for	Art. No.	Pack Qty.	
Chain clamps	Container-Ø 40-120 mm	E050.1	1 unit(s)	
Chain clamps	Container-Ø 80-150 mm	E051.1	1 unit(s)	
Chain clamps	Container-Ø 100-170 mm	E052.1	1 unit(s)	



Stand clamp telt clamp type

Usbeck. Material: Aluminium powder-coated, Handle made of nickel-plated steel.

With eccentric lock and cork inlay.

Belt length 600 mm, width 12 mm.

Technical specifications:

Art. No.	PH45.1
Shaft length	195 mm
Ø Shaft	10 mm

Version	Suitable for	Art. No.	Pack Qty.	
Belt clamp	Vessel Ø 60 to 170 mm	PH45.1	1 unit(s)	



Stand ring ROTILABO® with opening

Bochem. Material: Stainless steel 18/10.

Technical specifications:

Art. No.	CHN7.1	CHN8.1	CHN9.1
Total length	220 mm	280 mm	330 mm
Shaft length	160 mm	200 mm	220 mm
Ø Shaft	8 mm		

Version	Ø Internal (mm)	Ø ext. (mm)	Opening width (mm)	Art. No.	Pack Qty.	
Stand ring	50	68	35	CHN7.1	1 unit(s)	
Stand ring	70	87	50	CHN8.1	1 unit(s)	
Stand ring	100	120	70	CHN9.1	1 unit(s)	



Stand ring ROTILABO® with three-point support

ROTH SELECTION. Material: Stainless steel 18/10 (Remanit 4301), electrolytically polished.

Technical specifications:

Art. No.	C882.1	C883.1	C884.1	C885.1	C886.1
Total length	210 mm	240 mm	255 mm	290 mm	330 mm
Shaft length	150 mm		145 mm		155 mm
Ø Shaft	8 mm				

Version	Ø Internal (mm)	Ø ext. (mm)	Art. No.	Pack Qty.	
Stand ring	50	65	C882.1	1 unit(s)	
Stand ring	70	85	C883.1	1 unit(s)	
Stand ring	100	115	C884.1	1 unit(s)	
Stand ring	130	145	C885.1	1 unit(s)	
Stand ring	160	175	C886.1	1 unit(s)	



Stand material

Stand ring

Usbeck.



Technical specifications:

Art. No.	2206.1	2264.1	2210.1	2265.1	2211.1	2283.1	2336.1	2262.1
Total length	235 mm	240 mm	250 mm	255 mm	265 mm	270 mm	280 mm	300 mm
Shaft length	165 mm	70 mm	150 mm	55 mm	135 mm	40 mm	35 mm	135 mm
Ø Shaft	8 mm							

With three-point support

Material: Steel galvanised.

Version	Ø Internal (mm)	Ø ext. (mm)	Art. No.	Pack Qty.	
Stand ring	54	70	2206.1	1 unit(s)	
Stand ring	84	100	2210.1	1 unit(s)	
Stand ring	114	130	2211.1	1 unit(s)	
Stand ring	130	146	2262.1	1 unit(s)	

With three-point support and boss head

Material: Steel galvanised, boss head with brass screw, nickel-plated.

Version	Ø Internal (mm)	Ø ext. (mm)	Art. No.	Pack Qty.	
Stand ring	54	70	2264.1	1 unit(s)	
Stand ring	84	100	2265.1	1 unit(s)	
Stand ring	114	130	2283.1	1 unit(s)	
Stand ring	130	146	2336.1	1 unit(s)	

Stand material



Burette holder ROTILABO®

Usbeck. Material: Die-cast zinc nickel-plated.

Version	Span (mm)	Suitable for	Art. No.	Pack Qty.
for 1 burette	0–40	Rods up to Ø 16 mm	2048.1	1 unit(s)
for 2 burettes	0–40	Rods up to Ø 16 mm	2129.1	1 unit(s)



Thermometer clamp

Bochem.

With adjustable boss head (Angle 0–360 °).

Version	Span (mm)	Art. No.	Pack Qty.
Thermometer clamp	6–15	1C52.1	1 unit(s)



Burette holder

Kartell. Material: PP, with rubber grips and steel springs.

Lateral mounting provides for excellent burette readability.

Version	Suitable for	Art. No.	Pack Qty.
For 1 burette	Stand rod Ø 8–14 mm	PY63.1	1 unit(s)
For 2 burettes	Stand rod Ø 8–14 mm	PY64.1	1 unit(s)



Holding pliers

Bochem. Material: Stainless steel (18/10, electrolytically polished).

For evaporating dishes.

Span (mm)	Art. No.	Pack Qty.
75–100	1C55.1	1 unit(s)
100–250	1C56.1	1 unit(s)



Burette holder

Usbeck. Material: Aluminium (die-cast).

With roll mounting. Lateral mounting provides for excellent burette readability.

Version	Span (mm)	Art. No.	Pack Qty.
for 1 burette	0–20	PH49.1	1 unit(s)
for 2 burettes	0–20	PH50.1	1 unit(s)



Beaker tongs

ROTH SELECTION. Material: Stainless steel 18/10 (Remanit 4301), with cork inserts.

Ø (mm)	Length (mm)	Art. No.	Pack Qty.
30	200	YP93.1	1 unit(s)
40	220	YP94.1	1 unit(s)
50	250	YP95.1	1 unit(s)
60	300	YP96.1	1 unit(s)

Алматы (7273)495-231
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Саранск (8342)22-96-24
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Сургут (3462)77-98-35
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия (495)268-04-70

Казахстан (772)734-952-31

Киргизия (996)312-96-26-47